

MICOR FUSE 超小型保險絲管

Type 型號 : 275F

Fasting Acting UL 248快熔斷型

Electrical characteristics 電氣特性 :

Ampere rating

% of Ampere rating

Opening time

額定電流

電流百分比

熔斷時間

63mA-10A

100%

4 hours min 最快4小時

200%

5 second max. 5秒內

Approvals安全規格 :

UL and cUL


CCEE

File no. E205718

Cert.No.: CH0062593-2001



CCEE

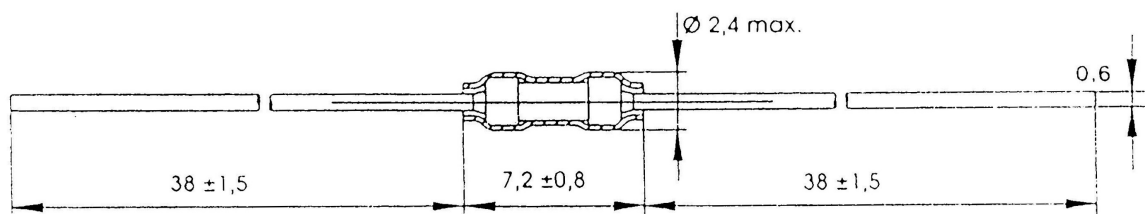

Part Number	Current mA/A	Voltage V	Breaking Capacity at 125Vdc	Voltage Drop max. mV IEC 127-3 sheet 2	Melting Integral mac. A2s	Approval UL/cUL	Approval CCEE
275F0063	63	125	300 A dc	2230	0.0002	*	*
275F0125	125			1500	0.0010	*	*
275F0250	250			1000	0.0070	*	*
275F0315	315			1000	0.0065	*	*
275F0375	375			1000	0.0060	*	*
275F0400	400			1000	0.0110	*	*
275F0500	500			1000	0.0180	*	*
275F0630	630			500	0.0230	*	*
275F0750	750			275	0.0400	*	*
275F0800	800			275	0.0420	*	*
275F1100	1.0		275	0.0940	*	*	
275F1125	1.25		275	0.1380	*	*	
275F1150	1.5		275	0.3300	*	*	
275F1160	1.6		275	0.4330	*	*	
275F1200	2.0		250	0.4100	*	*	
275F1250	2.5		250	0.8200	*	*	
275F1300	3.0		250	1.5000	*	*	
275F1315	3.2		250	1.2900	*	*	
275F1350	3.5		250	1.8000	*	*	
275F1400	4.0		225	3.2000	*	*	
275F1500	5.0	225	4.1000	*	*		
275F1700	7.0	150	11.0000	*	*		
275F2100	10.0	50 A dc	125	30.0000	*	*	

Note: * Approved認可

Packaging: Bulk 5000 piece per box

Ammo pack in 5000 piece

