


## MICOR FUSE 超小型保險絲管

Type 型號：385T 延時熔斷型

Time Lag Fuse to IEC127-3 sheet 4

Electrical characteristics 電氣特性：

Ampere rating 額定電流 1A-6.3A	1.5In 1 h min	2.1In -- 2 min. max.	2.75In 400ms min. 10 s max.	4In 150 ms min. 3s max.	10In 20 ms min. 150 ms max.
----------------------------------	------------------	----------------------------	-----------------------------------	-------------------------------	-----------------------------------

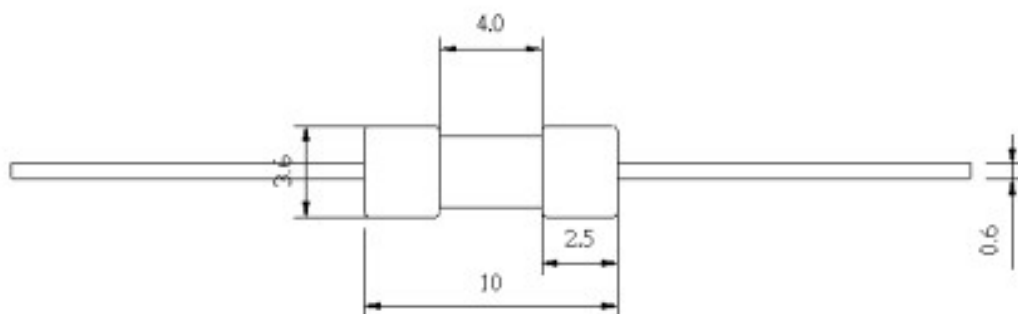

Part Number	Current mA/A	Voltage V	Breaking Capacity at 125Vdc	Voltage Drop max. mV IEC 127-3 sheet 2	Melting Integral mac. A2s	Approval UL/cUL
385T1100	1	250V	35A	140	3.00	*
385T1125	1.25			130	5.70	*
385T1160	1.6			120	6.90	*
385T1200	2			100	18.40	*
385T1250	2.5			100	23.50	*
385T1315	3.15			100	31.20	*
385T1400	4			100	65.40	
385T1500	5			100	110.00	
385T1630	6.3			100	179.00	

Note: \* Approved 認可 Applied申請中